

TOMCAT®

200/270

BURNISHERS



KEY FEATURES



Battery Power ensures a safe working environment during extended use indoors, with up to 3 hours of continuous run time.



Unique Burnishing Head is ideally balanced and fully floating to provide a long lasting finish over uneven floor surfaces.



An All Steel Frame supports the machine ensuring durability on the job while operating or storing.



Productivity Increase when switching from low speed floor buffers, boosting labor savings.



High Performance Motors reliably drive the machine with consistent quality of shine and polish.

VIEW INSIDE

Onboard Charger
Optional

Stainless Handlebar


Pad Adjustment

Poly Hood Opens
Completely


Non-marking tires

Balanced Deck
Shroud

Corner Bumpers

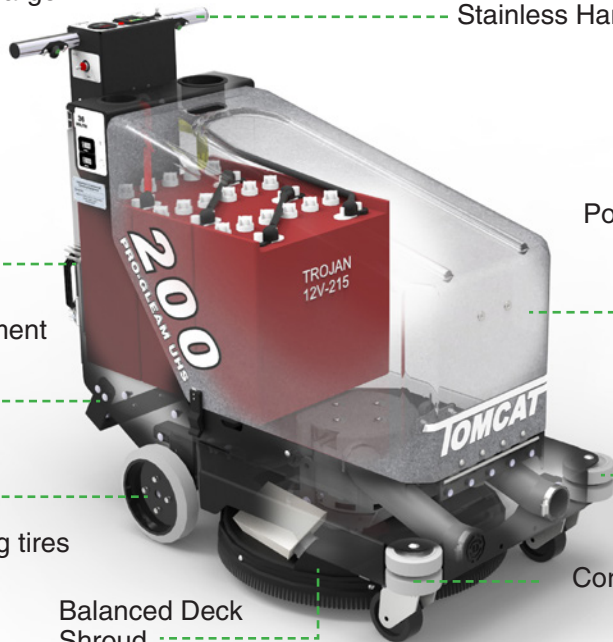

EASY ACCESS

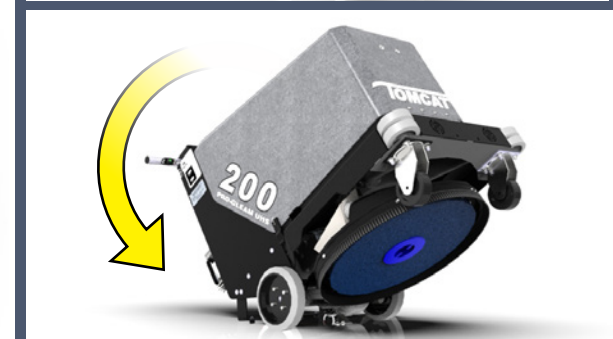

CALL FOR A DEMONSTRATION



Since 1986, our family owned company has been designing, building and supporting the best in floor maintenance equipment. Our **TOMCAT** brand services the world with unsurpassed commercial cleaning equipment, continually exceeding expectations and setting the industry bar that much higher.


We've built our reputation by providing the highest value machines and providing local support via 425 distributors in over 42 different countries.

☎ 800-450-9824


🌐 (+001)-262-681-6470

🌐 www.tomcatequip.com

AUTHORIZED DISTRIBUTOR



MODEL	WALK BEHIND 200-UHS	WALK BEHIND 270-UHS
CONSTRUCTION / DIMENSIONS		
Frame (Powder Coated steel):	1/8" (3.2 mm)	1/8" (3.2 mm)
Front Caster (Diameter x Width):	(2x) 4" x 2" (10.2 x 5 cm) - Non-Marking Solid Grey	(2x) 4" x 2" (10.2 x 5 cm) - Non-Marking Solid Grey
Rear Wheels (Diameter x Width):	(2x) 8" x 2" ([2x] 20.3 x 5 cm) - Non-Marking Grey	(2x) 8" x 2" ([2x] 20.3 x 5 cm) - Non-Marking Grey
Size (L x W x H):	44" x 24" x 40" (111.8 x 61 x 101.6 cm)	52" x 24" x 40" (132.1 x 61 x 101.6 cm)
Weight (w/o Batteries):	225 - 300 lbs (102.1 - 136.1 kg)	275 - 375 lbs (124.7 - 170.1 kg)
Weight (w/ Standard Batteries):	550 - 650 lbs (249.5 - 294.8 kg)	600 - 700 lbs (272.6 - 317.5 kg)
BURNISHING SYSTEM		
Pad Engagement:	Direct	Direct
Pad Diameter:	(1) 20" (50.8 cm)	(1) 27" (68.6 cm)
Pad Motor Power (std):	(1) 3.0 hp (2,237.1 watts)	(1) 3.5 hp (2,610 watts)
Pad Speed:	2000 rpm	1900 rpm
Variable Pad Pressure:	10 - 65 lbs (4.5 - 29.9 kg)	10 - 65 lbs (4.5 - 29.9 kg)
Pad Driver:	Flexible	Flexible
POWER SYSTEM		
System Voltage:	24 VDC	24 VDC
Standard Battery:	225ah WET	225ah WET
Optional Battery:	245ah WET, 215ah AGM	245 ah WET, 215ah AGM
Run Time:	Up to 3 Hours*	Up to 3 Hours*
<small>*Run times are based on continuous sweeping run times.</small>		
Charger:	120 VAC / 60Hz Input - 24 VDC / 25 AMP Output	120 VAC / 60Hz Input - 24 VDC / 25 AMP Output
DRIVE SYSTEM:		
Transport Power:	0.5 hp (373 watts)	0.5 hp (373 watts)
Forward Speed Control:	0 - 4.5 mph (0 - 7 kph)	0 - 4.5 mph (0 - 7 kph)
Reverse Speed Control:	0 - 3 mph (0 - 5 kph)	0 - 3 mph (0 - 5 kph)
Braking System:	Dynamic	Dynamic
FILTERING SYSTEMS:		
Filtering Material:	Disposable Bag	Disposable Bag
Screen Material:	1 Micron	1 Micron
Vacuum Description:	Passive	Passive
GENERAL:		
Minimum Aisle for U-Turn:	46" (116.8 cm)	54" (137 cm)
Decibels:	71 dBA	71 dBA
Productivity - Theoretical:	Up to 35,248 sqft (3,274.6 sqm)**	Up to 75,000 sqft (6,968 sqm)**
<small>**Productivity is based off of ISSA 2010 Cleaning Times</small>		
Productivity - Practical:	Up to 24,421 sqft (2,268.8 sqm)***	Up to 59,406 sqft (5,519 sqm)***
<small>***Productivity is based off of ISSA 2010 Cleaning Times</small>		



200



270



Manufactured By
 R.P.S. Corporation
 1711 South Street
 Racine, Wisconsin 53404 (USA)
 Phone: (800) 450-9824
 International: (+001) 262-681-6470
 www.tomcatequip.com